

Residential Gas Fired Condensing Water Boiler

PENNCO 
SILVER
CAST ALUMINUM

P90 Series
Gas Fired Condensing Water Boiler
90% AFUE



High Efficiency Cast Aluminum Heat Exchanger with low pressure drop

Hot Surface Ignition (HSI) Boiler Control

Fuel Smart Hydrostat Control: 3 functions in 1 Control

- Temperature Limit Control with easy dial settings and function indicator lights.
- Low Water Cut-Off (LWCO), protects the boiler from damaging low water conditions.
- Boiler Reset, lowers the boiler temperature to save fuel without sacrificing comfort.
Set-up is quick with no need to install an outdoor sensor, just dial in the number of heating zone

Small compact design is ideal for low clearance/limited space installations

Stainless Steel Premix Burner for corrosion resistance

Sealed Combustion - approved for Polypropylene venting

Induced Draft Blower with adjustable exhaust (front, right side or rear)

Easy to Install & Service:

- Choice of multiple supply and return locations (top, side or combination)
- Leveling Legs
- Junction Box provided
- Removable control panel for quick access
- Low profile condensate trap provides easy plumbing of condensate drain lines

15 Year Limited Residential Warranty

Pennco SILVER makes *Simple Comfort, Affordable.*

www.pennco boilers.com
PN 240010957 [09/10/21]

P90 Series




Gas-Fired Condensing Water Boiler

Standard Equipment:

- Boiler Control Module: HSI Integrated Boiler Control. Combination Hydrolevel High Limit and LWCO with boiler water temperature reset feature.
- Heat Exchanger: Cast Aluminum Heat Exchanger
- Combustion: Stainless Steel Premix Burner
Induced Draft Blower with adjustable exhaust (front, right side, rear) Induced Motor Assembly includes 5' schedule 80, 2" CPVC and CPVC Tee
- Electrical: Junction Box, Transformer and Wiring Harness
- Other: Temperature/Pressure Gauge. 30 PSI Safety Relief Valve, Pressure Switch(es), Low Profile Condensate Trap, Air Vent and Leveling Legs.
- Options: Natural Gas or Propane

Connections:

- Gas Inlet: 1/2"
- Supply & Return Tappings: 1 1/4"
- Condensate Drain: 1/2"
- Electric service to be 120 Volts, 15 Amps, 60 Hz.
(15 amp circuit recommended)

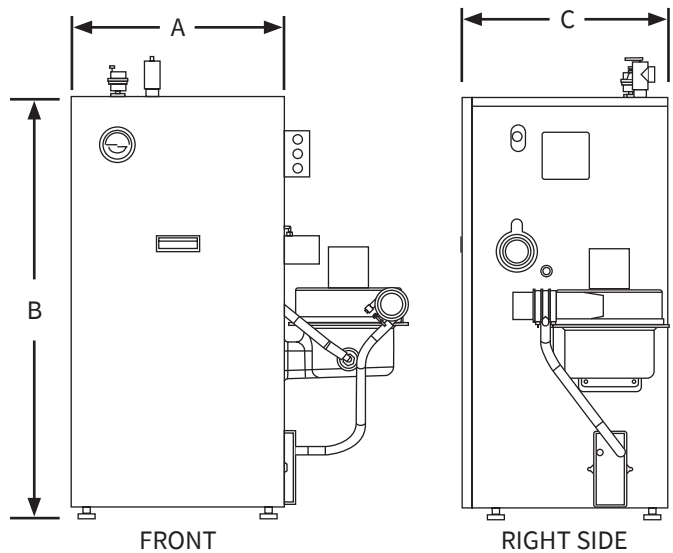

Specifications:

MODEL	Input MBH ⁽¹⁾	Heating Capacity MBH ⁽¹⁾⁽²⁾	Net Water MBH ⁽¹⁾⁽³⁾	Efficiency AFUE ⁽²⁾	Vent Pipe Size ⁽⁴⁾	Water Content Gallons	- A - Width	- B - Height	- C - Depth	Ship Weight
P90-50	50	45	39	90%	2" or 3"	2.6	17-3/4"	36-1/4"	17-3/8"	220 lbs.
P90-75	75	68	59	90%	2" or 3"	2.6	17-3/4"	36-1/4"	17-3/8"	220 lbs.
P90-100	100	90	78	90%	2" or 3"	2.6	17-3/4"	36-1/4"	17-3/8"	220 lbs.

(1) 1000 Btu/hr (British Thermal Units Per Hour)

(2) Heating capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedures.

(3) Net AHRI Ratings based on piping and pickup allowance or 1.15. Contact Technical Support before selecting boiler for installations having unusual piping and pickup requirements such as intermittent system operation, extensive piping systems, etc.

(4) Refer to IOM and vent pipe manufacturer's instructions for equivalent lengths and approved venting materials.

www.pennco boilers.com



50 psi MAWP



ECR International, Inc. 2201 Dwyer Avenue, Utica, NY 13501
Tel. 800 253 7900
www.ecrinternational.com

All specifications subject to change without notice.
©2021 ECR International, Inc.
PN 240010957 Rev. [09/10/21]